





2011 Product Catalog









ROTARY LASERS

Comprehensive line of rotary lasers with the right features and package solutions for your application.

-  Self-Leveling
-  Single Grade
-  Dual Grade
-  Laydown Positioning



Model	ALGR	ALHV	ALHV-G	ALH	LM800DP	LM800
						
Horizontal Accuracy @ 100-ft	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)
Rotation Rate (Preset Speeds)	0-1000 RPM	Variable (3)	Variable (3)	600 RPM	Variable (3)	Variable (3)
Range Indoors	660-ft (200m)	660-ft (200m)	820-ft (250m)	N/A	660-ft (200m)	660-ft (200m)
Range Exterior with Detector	2800-ft (850m)	2800-ft (850m)	1312-ft (400m)	2800-ft (850m)	2800-ft (850m)	2800-ft (850m)
Leveling Type (Degrees)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)
Beam Rating	Class 2M, 635nm	Class 2M, 635nm	Class 2M, 532nm	Class 2M, 650nm	Class 2M, 635nm	Class 2M, 635nm
Scanning w/ Spot Mode	Yes	Yes	Yes	N/A	Yes	Yes
Vertical Self-Leveling @ 100-ft	1/8-in (3.2mm)	1/8-in (3.2mm)	1/8-in (3.2mm)	N/A	1/8-in (3.2mm)	1/8-in (3.2mm)
Laydown Beam Positioning	Yes	Yes	Yes	N/A	Yes	Yes
Slope/Grade Capability ($\pm 10\%$)	Dual Dial-In	Dual	Dual	Single	Dual w/Remote	Dual w/Remote
Battery Type	4-"D" Cell	4-"D" Cell	NiMH	4-"D" Cell	NiMH	NiMH
Water/Dust Protection	IP67	IP67	IP67	IP67	IP54	IP54
Available Packages:						
Complete Package <i>Contents:</i>	57-ALGRPKG Remote, LD440 Detector w/Clamp, Glasses, (2) Magnetic Targets, V-Mount, Tripod, 8-ft Rod, Batteries, Case	57-ALHVPKG Remote, LD440 Detector w/Clamp, Glasses, (2) Magnetic Targets, V-Mount, Tripod, 8-ft Rod, Batteries, Case	N/A	57-ALHPKG LD440 Detector w/Clamp, Tripod, 8-ft Rod, Batteries, Case	N/A	57-LM800PKG Remote, LD440 Detector w/Clamp, Glasses, V-Mount, (2) Magnetic Targets, NiMH Battery Pack/Charger, Tripod, 8-ft Rod, Case
Detector Package <i>Contents:</i>	57-ALGRD Remote, LD440 w/Clamp, Batteries, Case	57-ALHVD Remote, LD440 Detector w/Clamp, Glasses, (2) Magnetic Targets, V-Mount, Batteries, Case	57-ALHVG Remote, LD440G Detector w/Clamp, Glasses, Magnetic Target, V-Mount, NiMH Rechargeable Batteries, Case	57-ALH LD440 Detector w/Clamp, Batteries, Case	57-LM800PDI LD-400 Detector w/Clamp, Remote, Glasses, (2) Magnetic Targets, V-Mount, NiMH Battery Pack and Charger, Case	57-LM800DI Remote, LD440 Detector w/Clamp, Glasses, (2) Magnetic Targets, V-Mount, NiMH Battery Pack and Charger, Case
Interior Package <i>Contents:</i>	N/A	57-ALHV Remote, Glasses, (2) Magnetic Targets, V-Mount, Batteries, Case	57-ALHVG Remote, Glasses, Magnetic Target, V-Mount, NiMH Rechargeable Batteries, Case	N/A	N/A	N/A
Other Package <i>Contents:</i>	N/A	N/A	N/A	N/A	N/A	N/A



Electronic Self-Leveling
for easier and faster set-ups. Self-leveling instruments will minimize errors on the jobsite.



Slope/Grade Capability
enhances the versatility for most interior and exterior applications.



ROTARY LASERS

Fast, accurate leveling - Work with confidence and increase productivity.



LM800GR	LMH-C	AL-500HV	AL-500H	LM30	Model
1/16-in (1.5mm)	3/32-in (2.4mm)	1/8-in (3.0mm)	1/8-in (3mm)	1/4-in (6mm)	Horizontal Accuracy @ 100-ft
600 RPM	600 RPM	0-1000 RPM	600 RPM	Variable (2)	Rotation Rate (Preset Speeds)
N/A	N/A	200-ft (60m)	N/A	200-ft (60m)	Range Indoors
2800-ft (850m)	2000-ft (610m)	1000-ft (305m)	1000-ft (305m)	800-ft (240m)	Range Exterior with Detector
Electronic ($\pm 5^\circ$)	Electronic ($\pm 3^\circ$)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)	Manual	Leveling Type (Degrees)
Class 2M, 650nm	Class 2M, 650nm	Class 2M, 635nm	Class 2M, 650nm	Class 2M, 635nm	Beam Rating
N/A	N/A	Yes	N/A	Yes	Scanning w/ Spot Mode
N/A	N/A	1/8-in (3.2mm)	N/A	1/4-in (6.4mm)	Vertical Self-Leveling @ 100-ft
N/A	N/A	Yes	N/A	N/A	Laydown Beam Positioning
Dual	Manual	Single	N/A	N/A	Slope/Grade Capability ($\pm 10\%$)
NiMH	4-"D" Cell	6-"AA" Cell	6-"AA" Cell	4-"C" Cell	Battery Type
IP54	IP54	IP54	IP54	N/A	Water/Dust Protection
57-LM800GRPKG LD400 Detector w/Clamp, NiMH Battery Pack and Charger, Tripod, 8-ft Rod, Case	57-LMHCUK LD400 Detector w/Clamp, Batteries, Tripod, 8-ft Rod, Case	57-AL500HVPKG Remote, LD-90 Detector w/Clamp, Glasses, Magnetic Target, Wall Mount, Batteries, Tripod, 8-ft Rod, Case	57-AL500HPKG LD-90 Detector w/Clamp, Batteries, Tripod, 8-ft Rod, Case	57-LM30PKG Glasses, Magnetic Target, Wiz-Mount, LD90 Detector w/Clamp, Batteries, Tripod, 8-ft Rod, Case	Complete Package <i>Contents:</i>
57-LM800GR Remote, LD400 Detector w/Clamp, NiMH Battery Pack and Charger, Case	57-LMH-CU LD400 Detector w/Clamp, Batteries, Case	57-AL500HVDI Remote, LD-90 Detector w/Clamp, Glasses, Magnetic Target, Wall Mount, Batteries, Case	57-AL500H LD-90 Detector w/Clamp, Batteries, Case	N/A	Detector Package <i>Contents:</i>
N/A	N/A	57-AL500HVI Remote, Glasses, Magnetic Target, Wall Mount, Batteries, Case	N/A	57-LM30I Remote, Target, Wiz-Mount, Batteries, Case	Interior Package <i>Contents:</i>
57-LM800GRPKG-3 Same as #57-LM800GRPKG 3-in-1 Tricase	57-LMHCUK-3 Same as #57-LMHCUK 3-in-1 Tricase	N/A	N/A	N/A	Other Package <i>Contents:</i>



Vertical Laydown

Positioning allows rotary lasers to be positioned for vertical applications such as walls or partitions.



Locate your laser

beam easily in bright light or over long distances with a full range of laser detectors.

ROTARY LASER ACCESSORIES

Enhance your performance and versatility with a full line of available accessories for your laser tools.



ROTARY LASER DETECTORS



Model	LD500	LD440G	LD440	LD400	LD120	LD90
Range	600-ft (180m)	1400-ft (200m)	1400-ft (425m)	1400-ft (425m)	1000-ft (305m)	500-ft (152m)
Bandwidth (mm)	5/10/25	.75/1.5/3.0	.75/1.5/3.0	.75/1.5/3.0	1.5/3.0	1.5/3.0
LCD Display(s)	1-Side	2-Sides	2-Sides	2-Sides	2-Sides	N/A
Visual LED's	Yes	Yes	Yes	N/A	N/A	Yes, 2 Sides
Audible	med/high	med/high	med/high	med/high	on/off	on/off
Display Channels	7	7	7	7	3	N/A
Strobe Shield™	Yes	Yes	Yes	N/A	N/A	N/A
Contents:	57-LD500 HD Rod Bracket (57-RB500), Pin, Case	57-LD440G HD Rod Bracket (57-RB440)	57-LD440 HD Rod Bracket (57-RB440)	57-LD400YEL HD Rod Bracket (57-RB400)	57-LD120 Rod Bracket (57-LDCLAMPN)	57-LD90 Rod Bracket (57-RB90)

Mounting Platform

- Make many applications easy and more versatile with adjustable platform.
- Aids in the installation of drop ceilings.
- Attaches to lasers with 5/8-11 threads.



Cat.#	Description
57-VMOUNT	Mount-Tripod Vertical and Wall/Ceiling

Target-Magnetic

- Attach to metal studs or drop ceiling t-bars.
- Inch/cm graduations.
- Ideal for drop ceilings.



Cat.#	Description
57-TARGET	Target-Red Laser
57-TARGET-G	Target-Green Laser

Laser Grade Adapter

- Set up lasers at desired grade.
- Vernier (± 10 minutes). Circular level vial and standard 5/8-11 mounting.
- Attaches to lasers with 5/8-11 threads.



Cat.#	Description
58-LGA	Laser Grade Adapter

Glasses-Laser

- Improves visibility of laser beams under bright conditions or over distances.
- One size fits most.



Cat.#	Description
57-GLASSES	Glasses-Red Laser
57-GLASSES-G	Glasses-Green Laser


PIPE LASER

Electronic pipe laser is designed with strength, accuracy, and reliability to operate on the most demanding jobsite conditions.

Model	LMPL20
Diode (#)	3R, 635nm (5)
Accuracy \pm	± 20 arc sec.
Range	800-ft (240m)
Grade Range	-15%, ~ +40%
Line Range	$\pm 15\%$
Cross Axis Leveling	Yes
Auto Line Centering	Yes
Battery Type	NiMH
Available Package:	
<i>Contents:</i>	59-LMPL20 Remote Control, Target Set, NiMH Battery Pack/Charger, Alkaline Battery Pack, 12V Cord, Leg Set (3), Case



Remote Control with Dual Wave Technology (both IR and RF frequency)



Multi-Function Remote with $\pm 15\%$ line control from center position.

Next day setups are quick and easy, pipe laser remembers previous day's grade and line settings. Illuminated display makes information easy to read. Remote and Pipe Laser matching keypad icons for visual recall and ease of use.



59-RC20

PIPE LASER ACCESSORIES



59-TARGET



59-LEGSET



59-LMPLCASE



59-BLOWER



59-PLMHT



LINE LAYOUT AND POINT ALIGNMENT LASERS AND ACCESSORIES

Increase your productivity with self-leveling laser technology to quickly establish level, alignment, plumb, and right angles.



Model	XLP-34	ILM-XTG	ILM-XT	CL10
Type	Cross-Line	Cross-Line	Cross-Line	Cross-Line
Laser Cross	3	1	1	1
Diode	Class 2M, 635nm (Down Plumb, 650nm)	Class 2M, 532nm	Class 2M, 635nm	Class 2, 630 - 670nm
Accuracy Up To ±	1/8-in @ 100-ft (3mm @30m)	3/32-in @ 30-ft (2.4mm @ 9m)	3/32-in @ 30-ft (2.4mm @ 9m)	1/8-in @ (3mm@6m)
Range Up To (Interior)	100-ft (30m)	100-ft (30m)	100-ft (30m)	Horizontal: 65-ft (20m) Vertical: 30-ft (10m)
Range Up To (Exterior w/Detector)	300-ft (92m)	N/A	100-ft (30m)	N/A
Leveling Type	Electronic, up to ±5°	Self-Leveling, up to ±5°	Self-Leveling, up to ±5°	Self-Leveling, ±4°
Battery Type	3- "AA" Cell	3- "AA" Cell	3- "AA" Cell	4- "AA" Cell
Interior Package <i>Contents:</i>	58-XLP34 Magnetic Laser Tripod, 2-Magnetic Targets, Glasses, Batteries, Case	58-ILM-XTG Magnetic Laser Tripod, Rechargeable Batteries/Charger Pack, Case	58-ILM-XT Magnetic Laser Tripod, 3- "AA" Alkaline Batteries, Case	CL10 Multi Mount, Batteries, Soft Carrying Case
Exterior Package <i>Contents:</i>	58-XLP34PKG XLD-2 Detector, B-Mount, Magnetic Laser Tripod, 2-Magnetic Targets, Glasses, Batteries, Case	N/A	58-ILM-XTE Magnetic Laser Tripod, LLD-20 Detector, Batteries, Case	N/A

Model	XP5	MP3
Type	5-Point	3-Point
Laser Cross	N/A	N/A
Diode	Class 2M, 635nm (5 points)	Class 3R, 650nm (3 points)
Accuracy Up To ±	Level/Square: 1/8-in @ 50-ft (3mm @ 15m) Up/Down: 1/8-in @ 15-ft (3mm @ 5m)	Level, Square and Plumb Up: 1/8-in @ 50-ft (3mm @ 15m) Down: 1/8-in @ 5-ft (3mm @ 2.5m)
Range Up To (Interior)	100-ft (30m)	100-ft (30m)
Range Up To (Exterior w/Detector)	N/A	N/A
Leveling Type	Self-Leveling, ±4°	Self-Leveling, up to ±5°
Battery Type	3- "AA" Cell	3- "AA" Cell
Interior Package <i>Contents:</i>	58-XP5 Multi-Mount, Trivet, Target, Strap, Batteries, Soft Case and Hard Case	58-MP3 Multi-Mount, Strap, Target, Trivet, Batteries, Case
Exterior Package <i>Contents:</i>	N/A	N/A

LINE LASER DETECTORS



Model	XLD-2	LLD-20
Range	300-ft (90m)	100-ft (30m)
Bandwidth (mm)	1.5/3.0	1.3/2.5
LCD Display(s)	2-Sides	2-Sides
Visual LED's	Yes	Yes
Audible	med/high	on/off
Display Channels	7	7
Strobe Shield™	Yes	N/A
<i>Contents:</i>	58-XLD2 Heavy-Duty Rod Bracket (57-RB440)	58-LLD20 Heavy-Duty Rod Bracket (57-RB400)

XTMT Mount Mounting Platform-ILMXT

- Designed for the ILM-XT for easy leveling and aligning-adjustment knobs
- Clips to channel, hangs, built-in magnets



Cat.#	Description
58-XTMT	Multi-Mount for ILM-XT

Mini-Laser Tripod

- Adjustable Mount with Quick Clamp
- Fits 1/4-20 thread lasers



Cat.#	Description
58-MINIT	Mount for ILM-XT

LP12-UM Laser Pole Platform System

- 12-ft (3.7m), 3-section laser pole with platform
- Level and align from the floor to the ceiling- quick and easy set-up
- Magnetic platform with horizontal and vertical adjustment knobs



Cat.#	Description
58-LP12-UM	12-ft Pole System

OPTICAL INSTRUMENTS

Make every leveling job faster and easier with CST/berger optical levels. CST/berger has been building quality, reliability, and value into their optical instruments since 1871.



Automatic Levels



Model	SAL32'N'	SAL28'N'	PAL 26X	SAL24'N'	PAL24X	PAL 22X	SAL20'N'
Magnification	32X	28X	26X	24X	24X	22X	20X
Leveling Accuracy (@ 100-ft)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/16-in (1.5mm)	1/8 in (3mm)	1/8 in (3mm)
Angular Accuracy	1°	1°	1°	1°	1°	1°	1°
Working Range	400-ft (120m)	350-ft (105m)	325-ft (100m)	300-ft (92m)	300-ft (92m)	250-ft (76m)	200-ft (60m)
Comp Setting	±0.3"	±0.5"	±0.5"	±0.8"	±0.8"	±0.8"	±0.8"
Available Packages:							
Complete Kit Contents:	55-SLVP32ND Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	55-SLVP28ND Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	55-PLVP26ND Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	55-SLVP24ND Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	55-PLVP24D Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	55-PLVP22ND Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	55-SLVP20ND Lens Cover, Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod
Standard Package Contents:	55-SAL32ND Lens Cover, Plumb Bob, Adjustment Tools, Case	55-SAL28ND Lens Cover, Plumb Bob, Adjustment Tools, Case	55-PAL26ND Lens Cover, Plumb Bob, Adjustment Tools, Case	55-SAL24ND Lens Cover, Plumb Bob, Adjustment Tools, Case	55-PAL24D Lens Cover, Plumb Bob, Adjustment Tools, Case	55-PAL22ND Lens Cover, Plumb Bob, Adjustment Tools, Case	55-SAL20ND Lens Cover, Plumb Bob, Adjustment Tools, Case

Levels and Transit-Levels



Model	200B	190B	136	135
Magnification	20X	20X	20X	20X
Leveling Accuracy (@ 100-ft)	1/4-in (6mm)	1/4-in (6mm)	1/4-in (6mm)	1/4-in (6mm)
Horizontal Angle	15'	15'	n/a	15'
Vertical Angle	1°	N/A	N/A	N/A
Working Range	200-ft (60m)	200-ft (60m)	200-ft (60m)	200-ft (60m)
Thread Tripod Base	5/8-11	5/8-11	5/8-11	5/8-11
Available Packages:				
Complete Package Contents:	54-200K Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	54-190K Plumb Bob, Adjustment Tools, Case, Tripod, 8-ft Rod	54-136K Adjustment Tools, Case, Tripod, 8-ft Rod	54-135K Adjustment Tools, Case, Tripod, 8-ft Rod
Standard Package Contents:	54-200B Plumb Bob, Adjustment Tools, Case	54-190B Plumb Bob, Adjustment Tools, Case	N/A	54-135 Adjustment Tools, Case

Automatic Level Tri-Case All-in-One Carrying Case



- Protects Instruments from Damage
- Stores Instruments in One Place
- Easy to Transport
- Fits 8-ft Rod

Cat.#	Description
55-TRCS	Tri-Case All-in-one Carrying Case Carries Automatic Level, Tripod, Rod



TOTAL STATIONS AND THEODOLITES

Designed with durability and proven simplicity, CST/berger offers a full lineup with professional performance at an affordable price.



Model	CST-302R Total Station	CST-305R Total Station	CST-205 Total Station	DGT-02 Theodolite	DGT-10 Theodolite
Magnification	30X	30X	30X	30X	30X
Resolving Power	3.0"	3.0"	4.0"	3.5"	3.5"
Field of View	1°30'	1°30'	1°30'	1°30'	1°30'
Minimum Focus	4.27-ft (1.3m)	4.27-ft (1.3m)	4.92-ft (1.5m)	4.27-ft (1.3m)	4.27-ft (1.3m)
Distance - Single Prism	9,840-ft (3,000m)	9,840-ft (3,000m)	5,249-ft (1,600m)	N/A	N/A
Distance - Reflectorless	984-ft (300m)	984-ft (300m)			
Angular Accuracy	2 Sec.	5 Sec.	5 Sec.	2 Sec.	5 Sec.
Internal Memory	10,000 Points, Built-in SD Card	10,000 Points, Built-in SD Card	50,000 Points	N/A	N/A
IP Rating	IP55	IP55	Weather Resistant	IP54	IP54
Package Contents:	56-CST302R Battery Pack (2) Battery Charger, Plumb Bob, Set of Tools, Software, USB and RS232 Cables, SD Card, Case	56-CST305R Battery Pack (2) Battery Charger, Plumb Bob, Set of Tools, Software, USB and RS232 Cables, SD Card, Case	56-CST205 2 Ni-MH Rechargeable Batteries w/Charger, Software, RS232 Cable, Tool Kit, Plumb Bob, Case	56-DGT2 Batteries, Tool Kit, Plumb Bob, Case	56-DGT10 Batteries, Tool Kit, Plumb Bob, Case

Total Station Accessories

Cat.#	Description
61-4300	CST300 Tribach, yellow only
56-USB300	USB Cable, CST300R
56-300RS232	RS-232 Data Transfer Cable, CST300R
56-300UPDATE	RS-232 Update Cable, CST300R
56-CHCTS	Battery Charger, NiMH for CST300R
56-CHCTSEU	Battery Charger CST300R Euro Charger
56-CHCTSAU	Battery Charger 300R Australian Charger
56-CHCTSUK	Battery Charger CST300R UK Charger
56-NMH300	Battery, NiMH for CST300R Total Station
56-NMHCTS	Battery Pack - NiMH, for Total Station (CST200 Series)



56-TSKIT-BS

56-TSKIT

56-TSKIT-CS

Total Station Accessory Kits

Cat.#	Description
56-TSKIT	Basic Total Station Starter Kit , Includes: 8-ft Maxi-Lite Prism Pole, Single Prism, Bipod, Prism Bag, Wood/Fiberglass Tripod
56-TSKIT-CS	Basic Construction Staking Kit , Includes: 8-ft Maxi-lite Prism Pole, Mini-Prism Pole System, Wood/Fiberglass Tripod
56-TSKIT-BS	Basic Site Starter Kit , Includes: Tribach-Optical Plummet, Tribach Adapter, Universal Single Prism, Prism Bag, Wood/Fiberglass Tripod



CST-300 Series Data upload and Data-Transfer through RS232 data port, USB and SD Card

- Reflectorless
- Absolute Encoded
- Dual-Axis Compensated

TRIPODS

Heavy-Duty Tripods

Cat.#	Type	Extended	Closed	Net Wt	Clamping Style	Head Style	Fastener	Hardware Colors Available
60-ALQR20	Aluminum	65" (165cm)	42" (107cm)	12lb (5.5kg)	Large Quick Clamp	ROUND	5/8-11	-B, -0
60-ALQRI20	Aluminum	65" (165cm)	42" (107cm)	12lb (5.5kg)	Quick Clamp	FLAT	5/8-11	-B, -0
60-ALQRI40	Aluminum	65" (165cm)	42" (107cm)	12lb (5.5kg)	Quick Clamp	FLAT	5/8-11	-B, -0
60-ALW20	Aluminum	65" (165cm)	42" (107cm)	13lb (5.5kg)	Wing Screw	ROUND	5/8-11	-B, -0
60-ALWI20	Aluminum	65" (165cm)	42" (107cm)	13lb (5.5kg)	Wing Screw	FLAT	5/8-11	-B, -0
60-WDF20	Fiberglass	72" (183cm)	42" (107cm)	16lb (7.2kg)	Quick Clamp	FLAT	5/8-11	-B, -0
60-FGHD20	Wood/Fiberglass	72" (183cm)	42" (107cm)	16lb (7.2kg)	Quick Clamp	FLAT	5/8-11	-B, -0
60-WDW20HV	Wood	72" (183cm)	42" (107cm)	16lb (7.2kg)	Wing Screw	FLAT	5/8-11	-B, -0
60-WDF-MAX	Fiberglass	72" (183cm)	42" (107cm)	16lb (7.2kg)	Dual	ROUND	5/8-11	-B, -0

Contractor Tripods

Cat.#	Type	Extended	Closed	Net Wt	Clamping Style	Head Style	Fastener	Hardware Colors Available
60-ALQCI21	Aluminum	63" (160cm)	38" (97cm)	9lb (4.1kg)	Quick Clamp	FLAT	1/2-20, 1/4-20	-B
60-ALQCI20	Aluminum	63" (160cm)	38" (97cm)	9lb (4.1kg)	Quick Clamp	FLAT	5/8-11	-B, -0
60-ALQCI40	Aluminum	63" (160cm)	38" (97cm)	9lb (4.1kg)	Quick Clamp	DOME	5/8-11	-0
60-ALQRI20ELAZ	Aluminum	88" (224cm)	48" (122cm)	16lb (7.2kg)	Quick Clamp	ELEVATOR	5/8-11	-B

Robotics/Machine Control Tripods

Cat.#	Type	Extended	Closed	Net Wt	Clamping Style	Head Style	Fastener	Hardware Colors Available
60-MCT	Aluminum	135" (343cm)	72" (183cm)	29lb (13kg)	Quick Clamp	ELEVATOR	5/8-11	N/A
60-MCTE	Aluminum	171" (434cm)	84" (213cm)	34lb (15.4kg)	Quick Clamp	ELEVATOR	5/8-11	N/A



TRIPOD ACCESSORIES


Tripod Adapters Easily adapt a tripod to fit your instrument.

Cat.#	Tripod Fastener	Adapts to Instrument Size
61-2506	5/8-11	11/16-26
61-2509	5/8-11	1/2-20
61-2510	5/8-11	3 1/2-8
61-2510A	3 1/2-8	5/8-11

Elevator Columns

Cat.#	Adj. Height	Fastener
60-ELAZ20	17" (43cm)	5/8-11
60-ELAZ25	17" (43cm)	3 1/2-8
60-ELAZ30	34" (86cm)	5/8-11
60-ELAZ35	34" (86cm)	3 1/2-8

Cat.#	Description
60-TFG20	Tripod Floor Guide

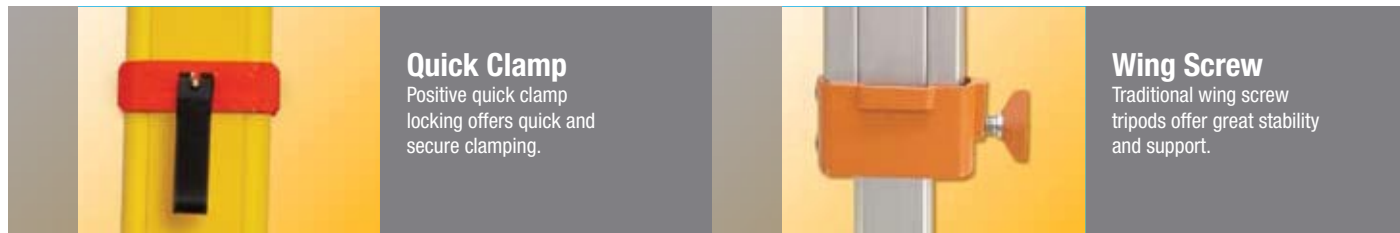

RODS

Telescoping Rods

Cat.#	Length	Units of Measure	Type	Sections
06-805MC	16-ft/5m	Metric "E" Ft/Inches/8ths	Aluminum	5
06-805MT	16-ft/5m	Metric "E" Ft/Inches/100ths	Aluminum	5
06-808A	8-ft	Feet/10ths/100ths	Aluminum	3
06-808C	8-ft	Feet/Inches/8ths	Aluminum	3
06-808M	2.5m	Metric "E"	Aluminum	3
06-913	13-ft	Feet/10ths/100ths	Fiberglass	4
06-913C	13-ft	Feet/Inches/8ths	Fiberglass	4
06-813	13-ft	Feet/10ths/100ths	Aluminum	4
06-813C	13-ft	Feet/Inches/8ths	Aluminum	4
06-904M	4m	Metric "E"	Fiberglass	4
06-804M	4m	Metric "E"	Aluminum	4
06-804MM	4m	E+1 mm	Aluminum	4
06-916	16-ft	Feet/10ths/100ths	Fiberglass	5
06-916C	16-ft	Feet/Inches/8ths	Fiberglass	5
06-816	16-ft	Feet/10ths/100ths	Aluminum	5
06-816C	16-ft	Feet/Inches/8ths	Aluminum	5
06-905M	5m	Metric "E"	Fiberglass	5
06-805M	5m	Metric "E"	Aluminum	5
06-805MM	5m	E+1 mm	Aluminum	5
06-805MMM	5m	1/2 cm/mm	Aluminum	5
06-925	25-ft	Feet/10ths/100ths	Fiberglass	6
06-925C	25-ft	Feet/Inches/8ths	Fiberglass	6
06-907M	7.6m	Metric "E"	Fiberglass	6

Laser Rods and Poles

"Cut and Fill" Rod

Cat.#	Length	Units of Measure	Sections	Extras
06-TLMB	2.4m	Metric	2	Bubble Vial



"Cut and Fill" Rod

ABNEY AND HAND LEVELS



Cat.#	Description	Length	Degrees (10min)	%Grade
17-640	Abney Level	5 1/4-in (13.3cm)	0° - 90°	Yes
17-642	Topographic Abney	6 3/8-in (16.1cm)	0° - 60°	Yes
17-643	K&E Type Topographic	7 3/8-in (18.7cm)	0° - 60°	Yes
17-645	5X Abney with Stadia	8 5/8-in (21.9cm)	0° - 90°	Yes
17-620A	Pocket Sighting Level- Aluminum			
17-621	Locke Hand Level	5-in (12.7cm)		
17-623	Hand Level	6-in (15.2cm)		
17-624	Round Hand Level	6-in (15.2cm)		
17-630	5X Magnifying Hand Level	8-in (20.3 cm), ext. 9-in (22.9cm)		
17-631	2X Magnifying Hand Level	6-in (15.2cm), ext. 8-in (20.3cm)		
17-632	K&E Type 2X Hand Level	6-in (15.2cm), ext. 7 1/2-in (19.1cm)		
17-635	5-in (12.7cm) Hand Level Case (17-621)			
17-637	7-in (17.8cm) Hand Level Case (17-623/-624/-631)			
17-639	9-in (22.9cm) Hand Level Case (17-630)			
17-638	Abney Level Case for 17-640/-641			
17-600EE	1X Eagle Eye Hand Level, w/stadia	5-in (12.7cm), ext. 7-in (17.8cm)		

PRISMS

0/-30mm Optima® Series

- Fully compatible with leading manufacturers.
- All metal holder and target warranted for life.
- Tension adjusting brass knob.
- Nickel plated brass 5/8-11 bayonet adapter



Cat.#	Description	
63-1010*	Single Tilt Assembly with Target	O, C, Y
63-1012*	Single Tilt Holder with Target Only	O, C, Y
63-1040*	30/40mm Prism Assembly with Target	O, Y
63-1010V	Prism-Optima® All-Metal	O, C, Y
63-2010MV	Prism-Universal, w/Metal Yoke	O, C, Y

*Specify color when ordering. If no color is specified, any color in stock will be shipped.



Optima® N2 Nitrogen Filled

- Hermetically sealed and charged with nitrogen.
- Fully compatible with leading manufacturers.
- Tension adjusting brass knob.

Cat.#	Description	
63-1010N	Optima® N2 Prism	O
63-2011N	Optima® N2 Prism in canister	O, C

0/-30mm Universal Polycarbonate

- Aluminum yoke and Delrin™ washers for excellent wear and long-term performance.
- Precision ground glass up to 2 arc seconds.
- Fully compatible with leading manufacturers.
- Single tilt holder tilts to 350°.
- Nickel plated brass 5/8-11 bayonet adapter.



Cat.#	Description	
63-2010*	Single Tilt Prism Assembly	O, Y
63-2010M*	Single Tilt Prism Assembly with Metal Yoke	ALL
63-2012M*	Metal Yoke Single Tilt Mount Only	ALL
63-2012*	Single Tilt Mount Only	C, O, Y

*Specify color when ordering. If no color is specified, any color in stock will be shipped.

Mini Prism, 0/-30mm Universal

- 25.4mm diameter prism, sealed in black anodized aluminum can.
- 5/8-11 mounting thread.
- Precision prism ground up to 2 arc seconds.
- On-board circular bubble vial.

Cat.#	Description
65-1500*	"Peanut Pack" Mini Prism Package
65-1500M	"Peanut Pack" All Metal Mini Prism Package
65-1505*	Mini Tilt Target Assembly with Prism Only
65-1505M*	All Metal Mini Tilt Target Assembly with Prism Only
65-1505RL	NEW Reflectorless Mini Prism
65-1512	25.4mm Mini Prism in Can Only

65-1500M, 65-1503M and 65-1505M colors: All others in colors:



65-1500



65-1500M



65-1505RL

Retro Prism, 73mm Diameter

- Encased in a light and rugged Lexan container.
- A red and white sighting pole is included with each assembly.
- Aluminum holders are machined and electrostatically painted for long-lasting finish.



64-2000

Cat.#	Description
64-2010	Single Prism Assembly with Pole
64-2011	Retro Prism Only- Lexan Container

Prism-Mini, Stake Out Pole System

- 25mm precise mini prism with 0/-30mm offset tilting aluminum prism and holder.
- Precision machined sectional poles.
- Padded carrying case w/ 2 points.

Cat.#	Description
65-1700-R	Mini Prism Pole System, Red



65-1700

Prism-Right Angle

- Permits stepping off angles of 90° and 180° with a center lens which permits foresight viewing.
- Features a larger field of view, and larger foresight viewing glass.

Cat.#	Description
66-911	Precise Large Double Right Angle Prism w/ Leather Case



Reflector System, -34mm Offset

- Low cost— ideal for short range jobs where retrieving the reflector is not an option.
- Brass push-button Leica style mounting mechanism.



Cat.#	Description
63-4000	For Reflectorless Total Stations (Leica, Rentax, etc.)

PRISMS

Prism-Robotics System, Black Anodized

- High precision 360° robotic prisms ensure tracking lock with the robotic instrument is quick.
- Dual 5/8-11 mounting threads (female).
- Six high precision copper coated 25.4mm prisms housed in a precisely CNC machined aircraft grade aluminum housing.



65-360-2
Height 86mm

Cat.#	Description
65-360R-2	Robotics Prism System- Zeiss, 100mm

NOTE: One free adapter is supplied with each unit. Special adapters available to match different brand total stations. Specify when ordering: Topcon, Trimble, Leica, Zeiss, etc.

Spectra Precision® Compatible Prisms

“Snap-In”, Zeiss Compatible

- -35mm offset Leica type H.I. and push-button mounting.
- High precision copper coated prism.
- “Snap-in” prisms and holder are compatible and interchangeable with Zeiss/Trimble holders and prisms.



Cat.#	Description
63-5035CZ	Snap-In Single Tilt Assembly with Target

TRIBRACHS



Cat.#	Description	Plummet
61-3500	Wild-Type Tribrach	Optical- 0.5-15m focus
61-4500	Value Line Tribrach	Optical- 0.5-15m focus
61-4635	Laser Tribrach	Laser- Dot ≥2mm@2m (6')

Several Colors to choose: BLK = Black, GRN=Green, GRY=Grey, and YEL=Yellow or TYL=TopCon Yellow.

GPS ACCESSORIES

Cat.#	Description
69-102	GPS Mag Mount
69-105*	GPS Receiver backpack w/ Quik-Lok™ antenna pole
69-106	Quik-Lok™ 2m GPS receiver pole
69-5988	Adapter - GPS Pole, 5/8-11

*-Standard color for backpacks is yellow; special colors are available: red-orange, blue, or chartreuse (hi-vis green). Please specify when ordering.



69-102

2-1/2” (62.5mm) Prism in Canister

These prisms will fit any prism holder with a M20x2 thread.



Cat.#	Description	Red	Orange	Chartreuse	Yellow	Black
63-2011*	Prism in Canister					
63-3011	Prism Copper Coated, in Canister					

*-Specify color when ordering. If no color is specified, any color in stock will be shipped.

Lighted Prism in Canister

A flashing red LED centered within allows easy targeting over long distances or under adverse weather conditions. Can be used with any offset and is compatible with all assemblies with M20 threads.



Cat.#	Description
63-4011	Prism in Canister

Leica® Compatible, “Snap-In”

- -34mm offset Leica type H.I. and push-button mounting.
- High precision copper coated prism.
- “Snap-in” prisms and holder are compatible and interchangeable with Leica/Wild holders and prisms.



63-3023

Cat.#	Description
63-3022	GP11 Type Co-Axial Single Tilt Assembly
63-3023	Same as Above Plus Target

These prisms and holders are interchangeable with Leica/Wild holders and prisms.

Adapters-Tribrach

Cat.#	Description
61-2520	Chicago Fixed Tribrach Adapter
61-2521	Friction Type Rotating Tribrach Adapter
61-2525	Zeiss/Wild Type Rotating Tribrach adj.
61-3511GRY	Pentax/Sokkia Style, Grey w/Optical Plummet



61-2520



61-3511GRY

GPS 2m Receiver Pole

Cat.#	Description
69-107*	GPS Carbon Fiber Rover Rod
69-107C	GPS Carbon Fiber Rover Rod

*-Colors available: Sokkia teal blue, Topcon/Javad chartreuse, Trimble yellow or black. Please specify when ordering.



69-107

69-107C

PRISM AND RANGE POLES



Quick-Lok™ Adjustable Top

- Sturdy and dent resistant aluminum construction.
- 10th and metric (every 2mm) graduations

Cat.#	Length	Outer Pole Dia.	Mounting Type	Section
67-4508TMA	8' (2.5m)	1-1/4" (32mm)	5/8-11, Adj. H.I.	2
67-4509TMA	8' (2.5m)	1" (25mm)	5/8-11, Adj. H.I.	2
67-4512TMA	12' (3.6m)	1-1/4" (32mm)	5/8-11, Adj. H.I.	3
67-4515TMA	15' (4.6m)	1-1/2" (38mm)	5/8-11, Adj. H.I.	4

Quick-Lok™ Composite Prism Pole

This pole is made of dent- and kink-resistant fiberglass composite sections and lightweight aircraft aluminum inserts.

Cat.#	Length	Outer Pole Dia.	Type	Section
67-4608TMA	8' (2.5m)	1-1/2" (38mm)	5/8-11 Quick-Loc	2



Collet Lock, Brass Telescoping

- High strength aluminum— resistant to warping and beakage.
- Wild/Leica type mounting stud is available.
- 5/8-11 mounting stud, 10ths/Metric graduations.

Cat.#	Length	Outer Pole Dia.	Type	Section
67-4209TM	8' (2.5m)	1-1/4" (32mm)		2
67-4209TMA	8' (2.5m)	1-1/4" (32mm)	Adj. H.I.— 3" (75mm)	2
67-4212TM	12' (3.6m)	1-1/4" (32mm)		3
67-4212TMA	12' (3.6m)	1-1/4" (32mm)	Adj. H.I.— 3" (75mm)	3
67-4215TM	15' (4.6m)	1-1/2" (38mm)		4
67-4215TMA	15' (4.6m)	1-1/2" (38mm)	Adj. H.I.— 3" (75mm)	4



Maxi-Lite™, Adjustable Top

High-grade, lightweight aircraft aluminum pole with easily visible precise level vial. Anodized graduation marks. Easy grip handle with twist lock.

Cat.#	Length	Weight	Section
67-4708TMA	8' (2.5m)	2.1 lbs. (0.95kg)	2
67-4712TMA	12' (3.6m)	2.8 lbs. (1.27kg)	3
67-4715TMA	15' (4.6m)	3.8 lbs (1.72kg)	4



Tru-Lock™ Adjustable Top

- Impact-resistant Delrin™ is self-contained.
- Non-slip positive clamping as well as quick release.
- Recessed circular bubble vial.

Cat.#	Length	Outer Pole Dia.	Type	Section
67-4408TMA	8'/2.5m	1-1/4" (32mm)	Standard, 5/8-11	2



Quick Release, Precise

The clamping mechanism is a pistol grip, quick release. "Lock-Tite™" holds set screw in position but allows adjustment of clamping tension to individual preference. 5/8-11 mounting stud.

Cat.#	Length	Outer Pole Dia.	Type	Section
67-4304	4' (1.25m)	1-1/4" (32mm)	Non-Graduated	2
67-4308TM	8' (2.5m)	1-1/4" (32mm)	10ths/Metric	2
67-4308TMA	8' (2.5m)	1-1/4" (32mm)	10ths/Metric, Adj.H.I.	2
67-4312TM	12' (3.6m)	1-1/4" (32mm)	10ths/Metric, Adj.H.I.	3
67-4312TMA	12' (3.6m)	1-1/4" (32mm)	10ths/Metric, Adj.H.I.	3

Duralast Range Poles

Constructed of a high strength aluminum core with alternating international orange and white ABS plastic tubing permanently attached to the aluminum. 5/8-11 thread joints for quick assembly. Includes solid steel hardened point.

Cat.#	Length	Outer Pole Dia.	Sections (length)
67-3708	8-ft (2.4m)	11/16" (1.7cm)	2 (4-ft)
68-3712	12-ft (3.6m)	11/16" (1.7cm)	3 (4-ft)

Range Pole, Poly-urethane Coated

High strength aluminum tubing which is electrostatically powder painted white then striped red. 5/8-11 thread, includes replaceable hardened steel point.

Cat.#	Length	Outer Dia.	Section(s)
68-3808	8' (2.5m)	1" (2.5mm)	2
68-3812	12' (3.6m)	1" (2.5mm)	3
68-3818	1.8m	1" (2.5mm)	1, with point and cap



Level-Rod, "Heads Up"

- One precise 10-minute vial.
- Two viewing angles with large aperture: 7/16".
- Special penta prism allows direct reading of adjustable circular bubble.
- Use with poles of 19-38mm (3/4" to 1-1/2") diameter.

Cat.#	Description
06-751	Heads Up Rod Level use for poles w/ diameter 0.80"



BIPODS AND TRIPODS

Side entry head with clamp for faster pole setup. The Quick-Loc systems allows non-slip quick clamping. The thumb release style allows easy adjustments with a push of a button. All fit 1" to 1-1/2" (25mm-38mm) poles.

Cat.#	Type	Style	Open	Closed
67-4250	Tripod	Quick Release	73" (185cm)	44" (112cm)
67-4260	Bipod	Quick Release	73" (185cm)	44" (112cm)
67-4250X	Tripod	Thumb Release	71-1/2" (182cm)	42-1/2" (108cm)
67-4260X	Bipod	Thumb Release	71-1/2" (182cm)	42-1/2" (108cm)

MEASURING TAPES

Pro-Series Fiberglass Tapes

These Pro-Series Fiberglass Tapes are made with nonwoven PVC-coated fiberglass of superior durability.



Cat.#	Length	Sides	Units of Measure
74-Y3001M	300-ft (91m)	2	10th/100ths, M/cm/2mm
74-Y3008M	300-ft (91m)	2	Ft/8ths, M/cm/2mm
74-Y3001	300-ft	1	Ft/10th/100ths
74-Y3008	300-ft	1	Ft/Inches/8ths (16" Center)
74-Y2001	200-ft	1	Ft/10th/100ths
74-Y2008	200-ft	1	Ft/Inches/8ths (16" Center)
74-Y1658M	165-ft (50m)	2	Ft/8ths, M/cm/2mm
74-Y1651M	165-ft (50m)	2	10th/100ths, M/cm/2mm
74-Y1008M	100-ft (30m)	2	Ft/8ths, M/cm/2mm
74-Y1001	100-ft	1	Ft/10th/100ths
74-Y1008	100-ft	1	Ft/Inches/8ths (16" Center)
74-Y501M	50-ft (15m)	2	10th/100ths, M/cm/2mm
74-Y501	50-ft	1	Ft/10th/100ths
74-Y20M	20m	2	M/cm/2mm, M/cm
74-Y30M	30m	2	M/cm/2mm, M/cm
74-Y50M	50m	2	M/cm/2mm, M/cm
74-Y100M	100m	2	M/cm/2mm, M/cm

"PRO-SERIES" POCKET TAPES

Power return features a smooth gliding action with a positive thumb lock and release. Weatherproof, impact-resistant plastic cases are enclosed in a rubber housing.



78-R258

Cat. #	Length	Side
78-R251	25-ft	ft/10ths/100ths
78-R258	25-ft	ft/in/8ths
78-R075M	7.5m	m/cm/mm

BRASS PLUMB BOBS

Precision machined for perfect balance and lacquered for a lasting finish. Includes a hardened steel point with ASA thread. Steel ASA screw cap allows storage for an extra point.

Cat. #	Size - Weight	Cat. #	Size - Weight
11-497	6 oz. (170g)	11-553	18 oz. (510g)
11-498	8 oz. (225g)	11-554	24 oz. (680g)
11-499	10 oz. (285g)	11-554A	32 oz. (910g)
11-550	12 oz. (340g)	11-554B	80 oz. (2270g)
11-551	14 oz. (400g)	11-555B	Extra point only
11-552	16 oz. (455g)		



Pro-Series Nylon-Clad Steel Tapes

An indispensable measuring tool designed for the precision-minded user. Open reels feature new rubber reinforced, rounded design, large soft rubber grip handle. 1/2" tape width.



Cat.#	Length	Sides	Units of Measure	End Type
82-30010A	300-ft	1	Ft/10th/100ths	Type A end
82-30010B	300-ft	1	Ft/10th/100ths	Type B end
82-30080A	300-ft	1	Ft/Inches/8ths	Type A end
82-30080B	300-ft	1	Ft/Inches/8ths	Type B end
82-30018B	300-ft	2	Ft/10th, Ft/Inches	Type B end
82-20010A	200-ft	1	Ft/10th/100ths	Type A end
82-20010B	200-ft	1	Ft/10th/100ths	Type B end
82-20080A	200-ft	1	Ft/Inches/8ths	Type A end
82-20080B	200-ft	1	Ft/Inches/8ths	Type B end
82-1651MA	165-ft (50m)	2	Ft/10ths	Type A end
82-1658MA	165-ft (50m)	2	M/Inches	Type A end
82-10010A	100-ft	1	Ft/10th/100ths	Type A end
82-10010B	100-ft	1	Ft/10th/100ths	Type B end
82-10080A	100-ft	1	Ft/Inches/8ths	Type A end
82-10080B	100-ft	1	Ft/Inches/8ths	Type B end
82-10018B	100-ft	2	Ft/10th, Ft/Inches	Type B end
82-1001MA	100-ft (30m)	2	M/10ths	Type A end
82-1008MA	100-ft (30m)	2	M/Inches	Type A end
82-30MA	30m	1	Metric	Type A end
82-50MA	50m	1	Metric	Type A end
82-100MA	100m	1	Metric	Type A end

PLUMB BOB TARGETS

Cat. #	Description
11-431	2-in x 4-in Plastic Rectangular Target, red & white, notched



GAMMON REELS

An aid to set up and deploy a clean, accurate plumb. Slip the reel into your palm and draw the bob to desired position and stop with finger pressure. Steel clock spring zips the string back into case.

Cat. #	Description
11-728	Gammon Reel®, with hi-vis black and orange target
11-729	12-in / 3.6m Gammon Reel®
11-730	6 1/2-in / 1.9m Gammon Reel®, with 72 lb. test Orange nylon cord
11-731	Bobbin of Orange Nylon Cord, 24 yds./21.9m



REPLACEMENT PLUMB BOB CORD

Braided linen cord comes in 25 yd. spools.

Cat. #	Description
11-733	White - Replacement



MAGNETIC LOCATORS

Locate ferrous objects under ground, under water, or in snow. Ergonomically designed for complete one-handed operation.



Magnetic Locators

Features:

- Length: 42-3/4"; Weight: 3 lbs./1.3kg
- Waterproof up to housing; water-resistant housing
- Easy access battery compartment
- On/Off, Volume, and Sensitivity Controls
- Strong, lightweight aluminum tube with durable hard rubber tie
- "High-Tech" magnetic toroidal sensors and electronic balancing circuitry



Magna-Trak®

Model	MT100	MT101	MT102	MT200	MT202
Erase Feature			✓		✓
Power Line Indicator			✓	✓	✓
Sensitivity Control	✓	✓	✓	✓	✓
Volume Control	✓	✓	✓	✓	✓
LCD Digital Display	✓		✓	✓	✓
Low Battery Indicator	✓		✓	✓	✓
Analog Bar Graph				✓	✓

Cat.#	Description	Cat.#	Description
19-550	MT100, Soft Case	19-200SC	MT200, Soft Case
19-551	MT100, Hard Case	19-200HC	MT200, Hard Case
19-555	MT101, Soft Case	19-202SC	MT202, Soft Case
19-556	MT101, Hard Case	19-202HC	MT202, Hard Case
19-557	MT102, Soft Case		
19-558	MT102, Hard Case		

Masonry/Magnetic Nails

Cat.#	Length	Diameter
20-7511	3/4 in	1/8 in
20-7521	1 in	5/32 in
20-7531	1-1/4 in	3/16 in
20-7541	1-1/2 in	1/4 in
20-7551	2 in	1/4 in
20-7561	2-1/2 in	1/4 in

Hardened masonry nails are cadmium plated to resist rust and increase visibility. 100 nails per package.



One-Handed Operation

Digital display with volume and sensitivity keypad. (MT200 and MT202 only.)



"Erase" Magnetic Interference.

(MT102 and MT202 only.)



CST/berger – Warranty Statement

CST/berger is a brand that belongs to the Robert Bosch Tool Corporation (“Seller”), and utilizes the Bosch Service Center network throughout North America.

Limited Warranty Program

Robert Bosch Tool Corporation (“Seller”) warrants to the original purchaser only, that all CST/berger laser tools and optical instruments will be free from defects in material or work-manship for a period of one (1) year from date of purchase. Bosch will extend warranty coverage to two (2) years when you register your product within eight (8) weeks after date of purchase. Product registration card must be complete and mailed to Bosch (postmarked within eight weeks after date of purchase), or you may register on-line at www.cstberger.us/na/productregistration. If you choose not to register your product, a one (1) year limited warranty will apply to your product.

30 Day Money Back Refund or Replacement -

If you are not completely satisfied with the performance of your laser or optical instrument, for any reason, you can return it to your CST/berger dealer within 30 days of the date of purchase for a full refund or replacement. To obtain this 30-Day Refund or Replacement, your return must be accompanied by the original receipt for purchase of the laser or optical instrument product. A maximum of 2 returns per customer will be permitted.

SELLER’S SOLE OBLIGATION AND YOUR EXCLUSIVE REMEDY under this Limited Warranty and, to the extent permitted by law, any warranty or condition implied by law, shall be the repair or replacement of parts, without charge, which are defective in material or workmanship and which have not been misused, carelessly handled, or misrepaired by persons other than Seller or Authorized Service Center. To make a claim under this Limited Warranty, you must return the complete laser, optical instrument or CST/berger product, transportation prepaid, to any BOSCH Factory Service Center or Authorized Service Center. Please include a dated proof of purchase with your tool. For locations of nearby service centers, please use our on-line service locator or call 1-877-267-2499.

THIS WARRANTY PROGRAM DOES NOT APPLY TO POLES AND PRISMS. Robert Bosch Tool Corporation (“Seller”) warrants these items for a period of one (1) year from date of purchase.

THIS LIMITED WARRANTY DOES NOT APPLY TO ACCESSORY ITEMS SUCH AS TRIPODS, RODS, HAND LEVELS, FIELD SUPPLIES, TAPES, MOUNTING DEVICES AND OTHER RELATED ITEMS. THESE ITEMS RECEIVE A 90 DAY LIMITED WARRANTY.

NOTE: CST/berger Magnetic Locators receive a five (5) year limited warranty.

To make a claim under this Limited Warranty, you must return the complete product, transportation prepaid. For details to make a claim under this Limited Warranty please visit www.cstberger.com or call 1-877-267-2499.

ANY IMPLIED WARRANTIES SHALL BE LIMITED IN DURATION TO ONE YEAR FROM DATE OF PURCHASE. SOME STATES IN THE U.S., AND SOME CANADIAN PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.





IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING BUT NOT LIMITED TO LIABILITY FOR LOSS OF PROFITS) ARISING FROM THE SALE OR USE OF THIS PRODUCT. SOME STATES IN THE U.S., AND SOME CANADIAN PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE IN THE U.S., OR PROVINCE TO PROVINCE IN CANADA AND FROM COUNTRY TO COUNTRY.

THIS LIMITED WARRANTY APPLIES ONLY TO PRODUCTS SOLD WITHIN THE UNITED STATES OF AMERICA, CANADA AND THE COMMONWEALTH OF PUERTO RICO. FOR WARRANTY COVERAGE WITHIN OTHER COUNTRIES, CONTACT YOUR LOCAL BOSCH DEALER OR IMPORTER.

CST/berger is a registered trademark of Robert Bosch Tool Corporation.

Laser products in this catalog have the below applicable safety labels referred to by their listed laser classification.



CST/berger

www.cstberger.com

Phone: 815-432-9200
Toll Free: 800-435-1859